
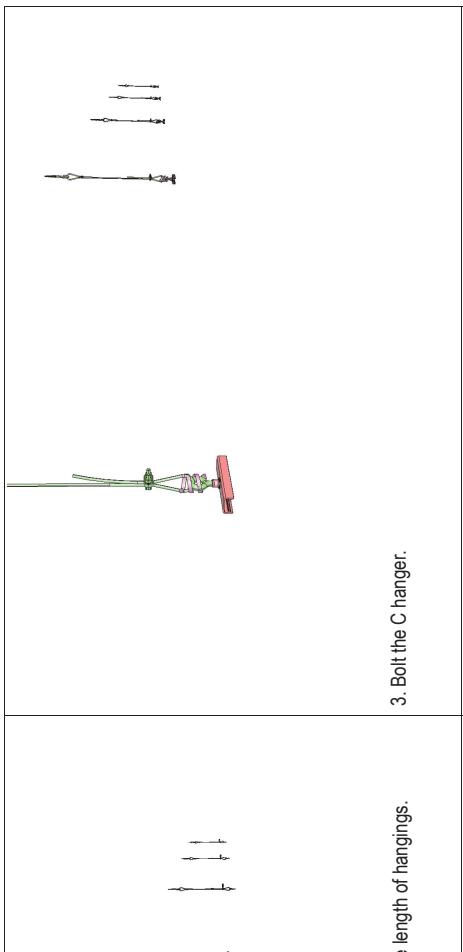
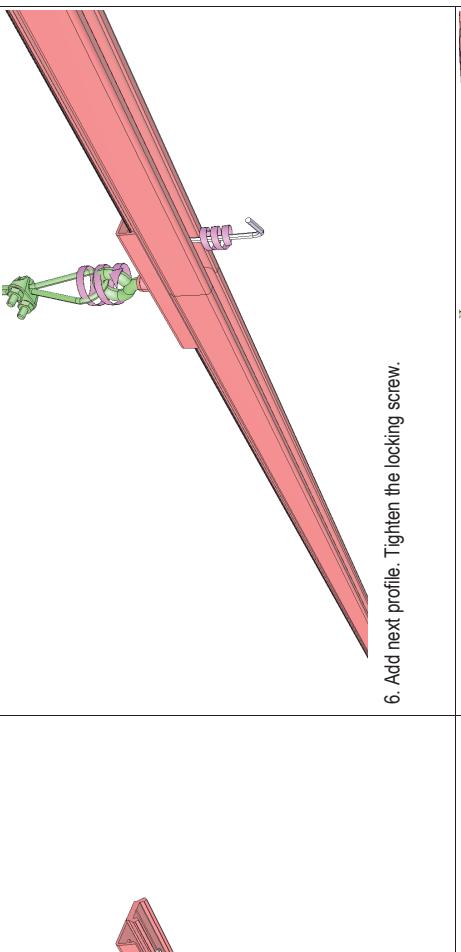
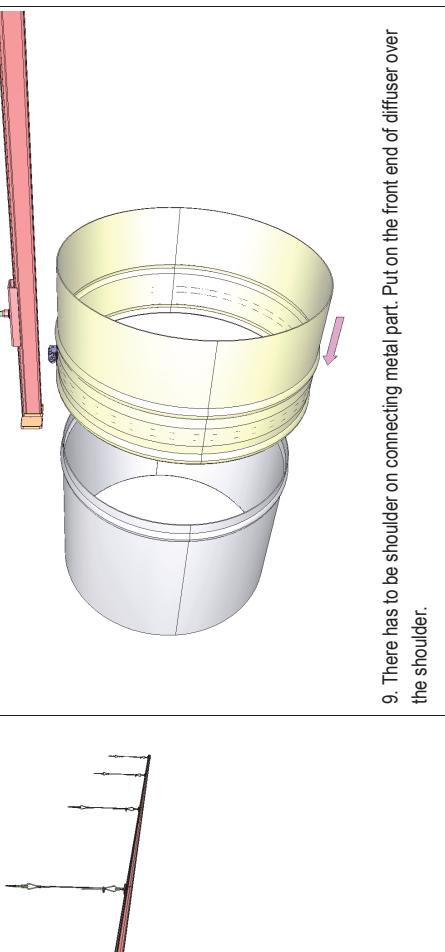
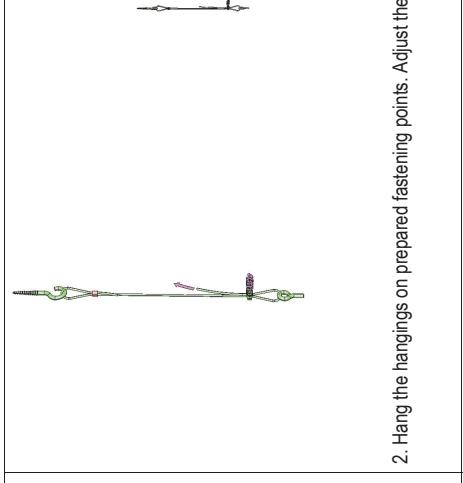
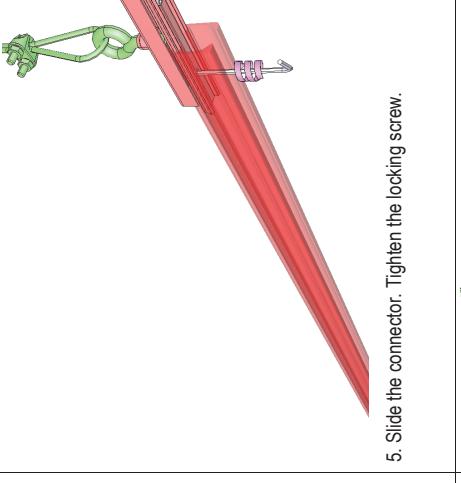
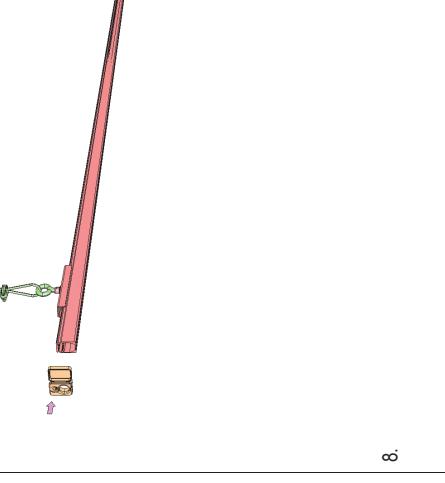
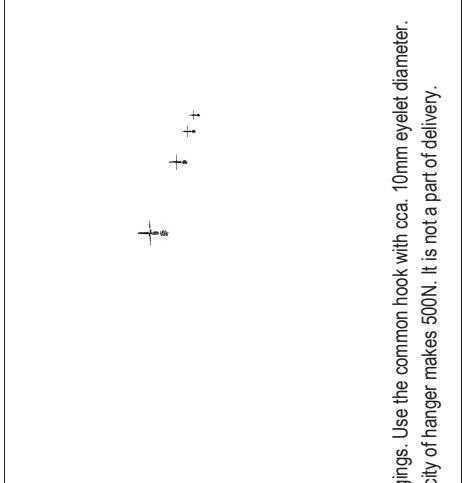
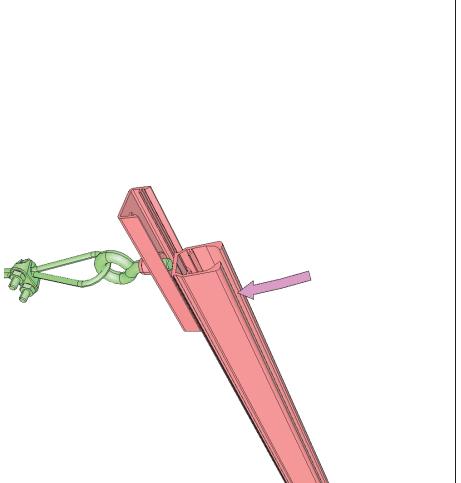
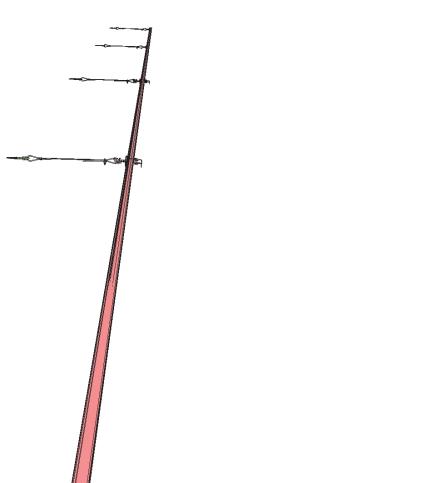


MOUNTING INSTRUCTION for Installation 5AL - single suspension, enlarged strip, Al profile, wire hanger, tensioner in profile

Tailor-made Air Ducting&Diffusers

 <p>1. Mark the position of hangings. Use the common hook with cca. 10mm eyelet diameter. The sufficient loading capacity of hanger makes 500N. It is not a part of delivery.</p>	 <p>2. Hang the hangings on prepared fastening points. Adjust the length of hangings.</p>	 <p>3. Bolt the C hanger.</p>
	 <p>4. Click in the profile.</p>	 <p>5. Slide the connector. Tighten the locking screw.</p>
	 <p>6. Add next profile. Tighten the locking screw.</p>	 <p>7. Add next profile.</p>
		 <p>8.</p> <p>9. There has to be shoulder on connecting metal part. Put on the front end of diffuser over the shoulder.</p>

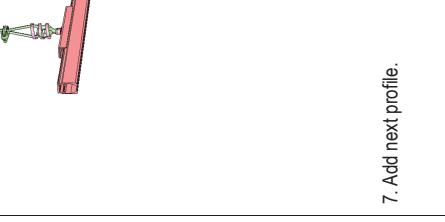