




1. Mark the position of hanging points on the profile.

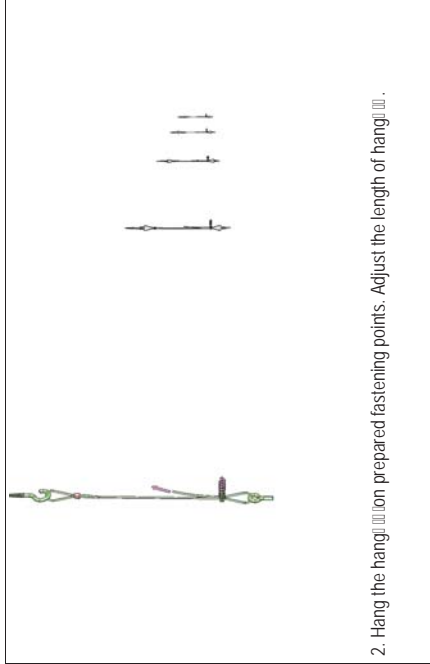


2. Hang the hanging points on prepared fastening points. Adjust the length of hanging points.

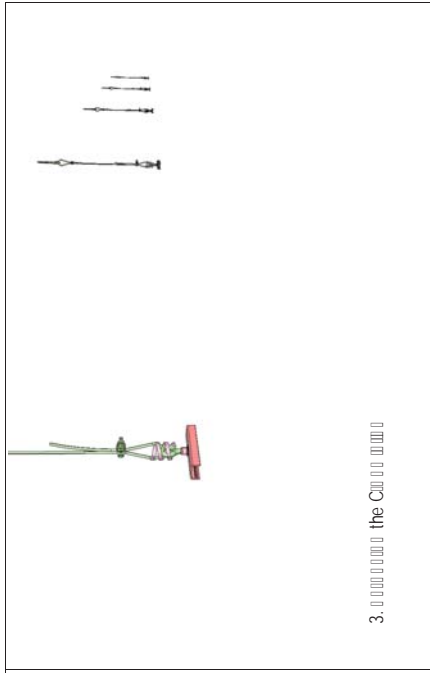


3. Adjust the hanging points.

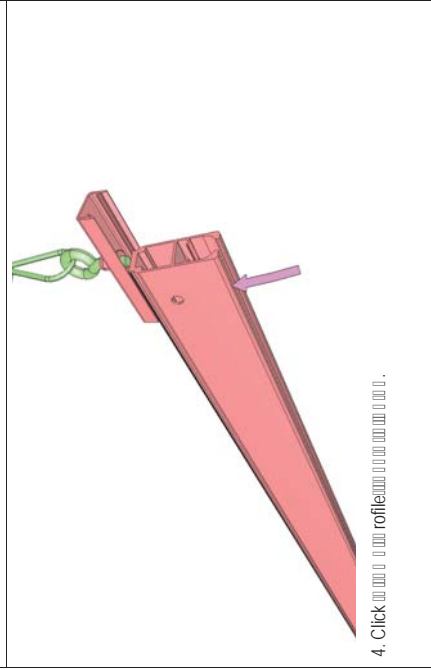


4. Click the profile into the ceiling and tighten the locking screw.

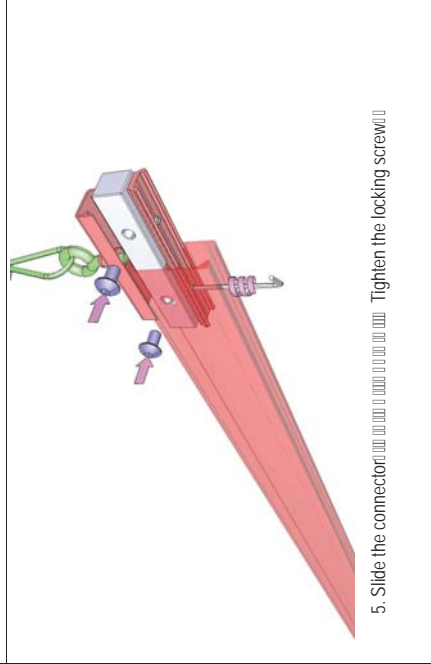


5. Slide the connector into the ceiling and tighten the locking screw.

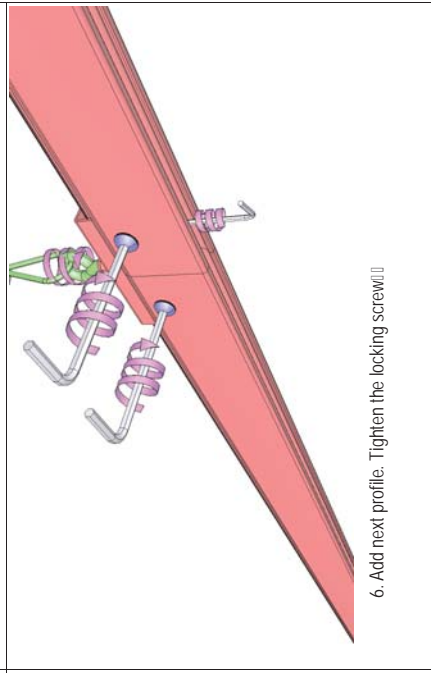


6. Add next profile. Tighten the locking screw.

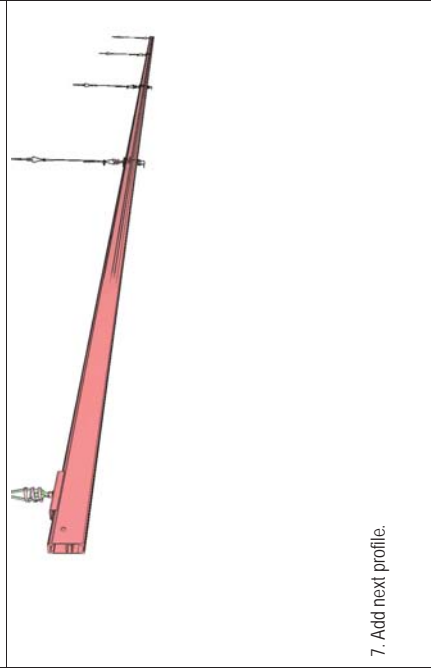


7. Add next profile.

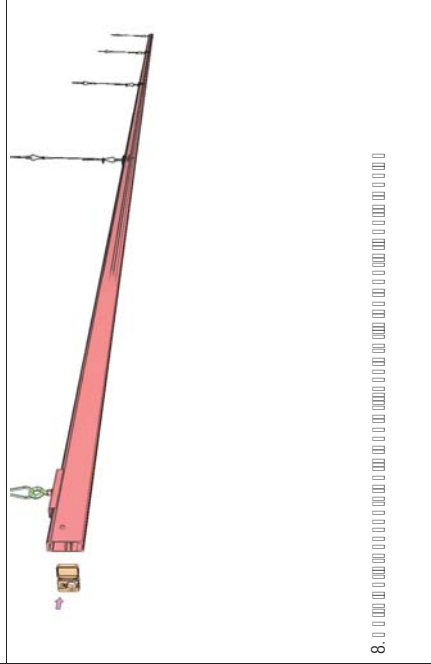


8. Add next profile. Tighten the locking screw.

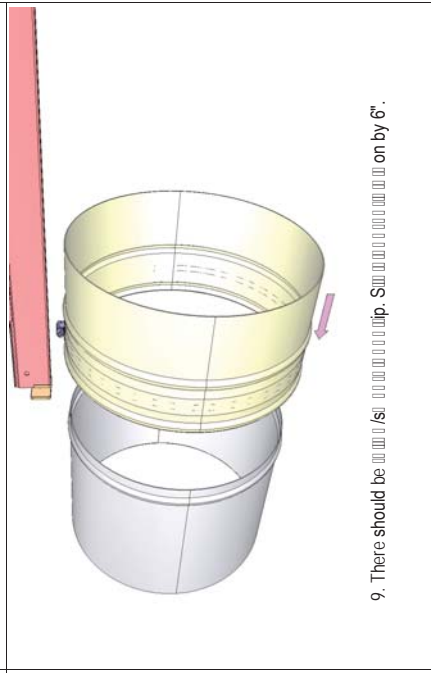


9. There should be a gap of 6 mm between the profiles. The distance between the profiles should be 6 mm.

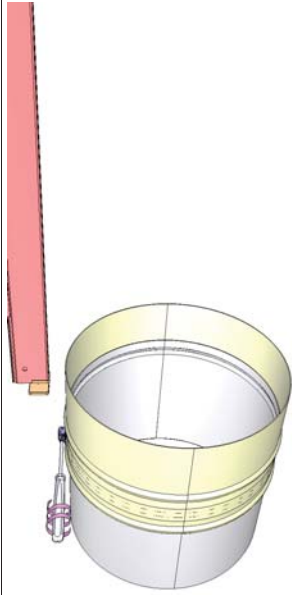


10. Clamp connecting strip

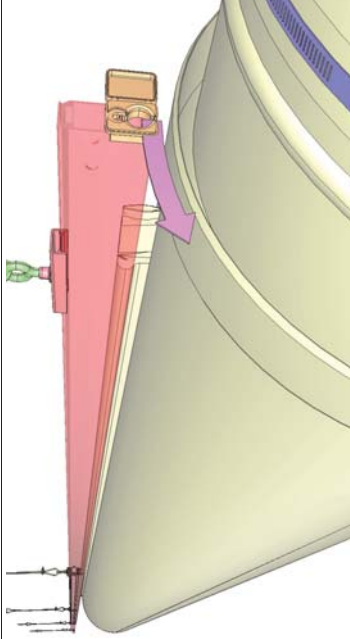


11. Join the individual parts of diffusers

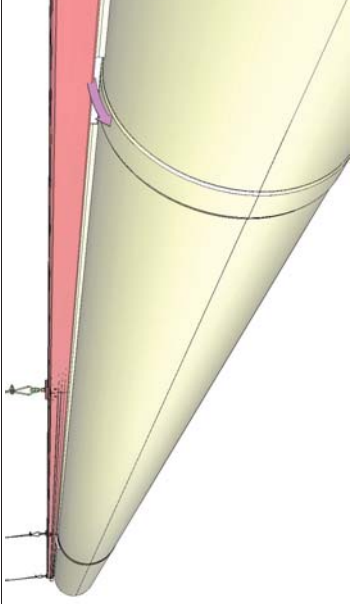


12.

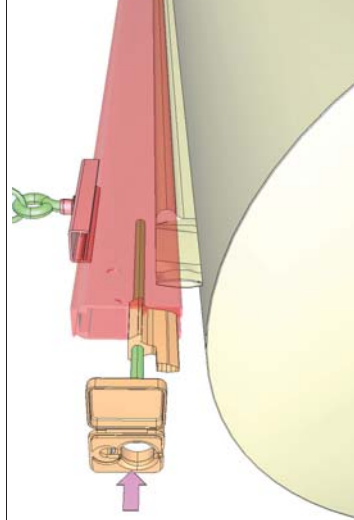


13 Remove plug and slide tensioner in end of track profile

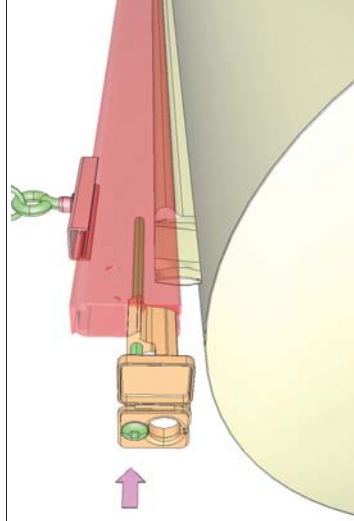

14. Put plastic end cap plug in place and have tensioner grab tensioning fabric pocket.

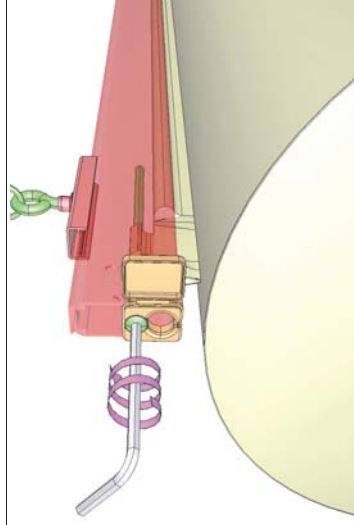

15. Tension duct in track by turning tensioner screw.

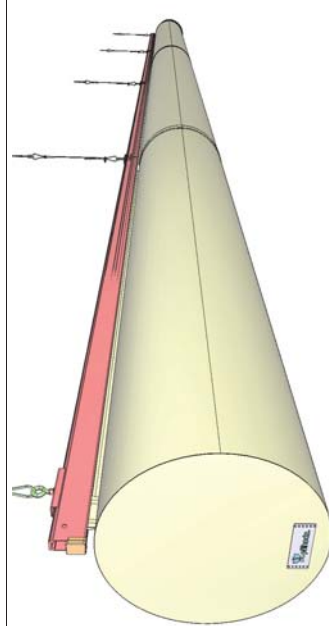

16. Turn on fan, instalation complete.